

# LINKSYS® Quick Installation

For Windows XP ONLY

This Quick Installation is meant to help you install the product quickly and easily. For detailed instructions on installation, configuration, and further setup options, please consult the User Guide.

Instant Wireless® Series

## Dual-Band Wireless A+G Notebook Adapter



WPC55AG

### Package Contents

- Dual-Band Wireless A+G Notebook Adapter (1)
- Setup CD-ROM with User Guide (2)
- Quick Installation and Registration Card



## 1 Installing the Dual-Band Wireless A+G Notebook Adapter into Your PC

**Note to Windows 98, Me, and 2000 users:** Refer to the Quick Installation for Windows 98, Me, and 2000.

- A. Turn off your notebook PC.
- B. Locate an available CardBus slot on your notebook PC.
- C. With the Adapter's label facing up, as shown in Figure C, slide it completely into the CardBus slot.



- D. Turn on your notebook PC.
- E. Windows will begin copying the driver files to your computer. If Windows asks you for the original Windows CD-ROM, insert the CD-ROM, and direct Windows to its proper location (e.g., D:\).

Proceed to Step 2.

## 2 Installing the Dual-Band Wireless A+G Notebook Adapter Driver

- A. Windows XP will automatically detect the Adapter. Click the radio button next to **Install the software automatically (Recommended)**. Insert the Setup CD-ROM into your computer's CD-ROM drive. Then click **Next**.



**Important:** Do NOT run the Setup Wizard. If the Setup Wizard runs automatically after the Setup CD-ROM has been inserted, click **Exit**.

- B. Windows will notify you that the driver has not passed Windows Logo testing. This is normal, and it has been verified that the Adapter does work with Windows XP. Click **Continue Anyway**.

- C. When Windows has finished installing the driver, click **Finish**.



Proceed to Step 3.

Continued on back

### 3 Configuring the Dual-Band Wireless A+G Notebook Adapter

**Note:** Windows XP has a built-in configuration tool. Use Windows XP Wireless Zero Configuration (located in the system tray at the bottom of your screen) to configure the Adapter.

A. After installing the Adapter, the Windows XP Wireless Zero Configuration icon will appear in your computer's system tray. Double-click the icon.




**Note:** These instructions are for Windows XP with Service Pack 1 installed. If you have not installed Service Pack 1, select the network you want, and click the **Connect** button. If the network has WEP encryption enabled, enter the WEP key in the *Network key* field, and then click the **Connect** button.


B. The screen that appears will show any available wireless network. Select the network you want.

If this network has WEP encryption enabled, go to Step C.


If this network does not have WEP encryption enabled, then the screen in Figure B will appear. Make sure the box next to *Allow me to connect to the selected wireless network, even though it is not secure* is checked. Then click **Connect**, and go to Step D.

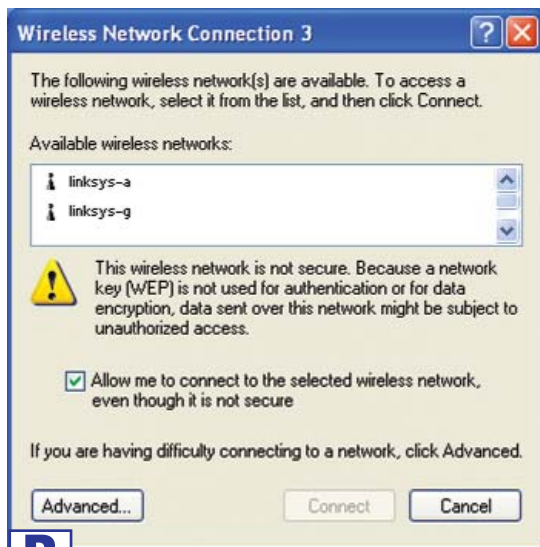

C. If WEP is enabled, the screen in Figure C will appear. Enter the WEP key of your wireless network in the *Network key* field, and re-enter it in the *Confirm network key* field. Then click **Connect**.

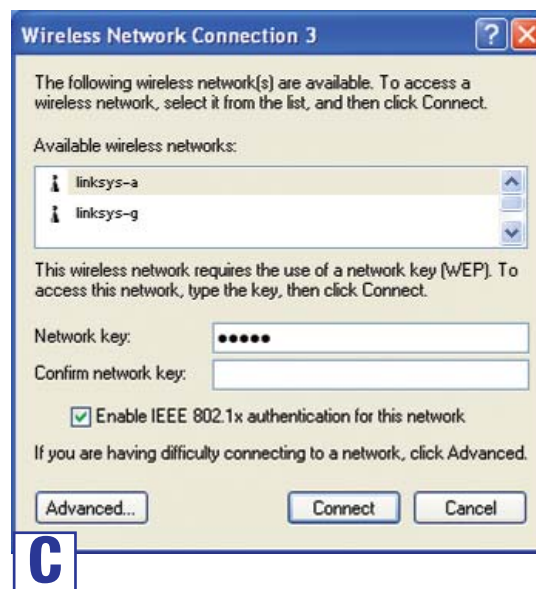

D. The screen in Figure D will appear if your connection is active.

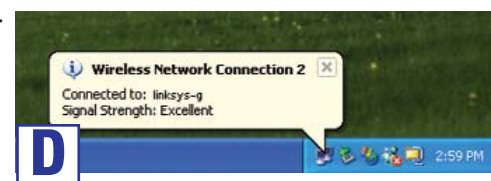

For more information about wireless networking on a Windows XP computer, click **Start** and then **Help and Support**. Enter the keyword **wireless** in the field provided, and press the **Enter** key.

**Congratulations! The installation of the Dual-Band Wireless A+G Notebook Adapter is complete.**

**For additional information or troubleshooting help, refer to the User Guide on the Setup CD-ROM. You can also call or e-mail for further support.**

<b>24-hour Technical Support</b>	<b>800-326-7114 (toll-free from US or Canada)</b>
<b>E-mail Support</b>	<b>support@linksys.com</b>
<b>Website</b>	<b>http://www.linksys.com or http://support.linksys.com</b>
<b>RMA (Return Merchandise Authorization) Issues</b>	<b>http://www.linksys.com/support</b>
<b>FTP Site</b>	<b>ftp://ftp.linksys.com</b>
<b>Sales Information</b>	<b>800-546-5797 (800-LINKSYS)</b>