

## Increase the effective range of your wireless devices!



Increase the range of your Wireless network! Attach these high gain antennas to your Linksys Wireless Broadband Router or Access Point, and increase both the effective strength of the outgoing signals, and the receive sensitivity for incoming signals.

The added signal strength and sensitivity also improves close-range communication reliability because every packet comes through "loud and clear", reducing retransmissions due to weak signal reception errors.

To install, just unscrew your current antennas, and attach the High Gain antennas in their place. There are no drivers to install, and no modifications to your setup are necessary.

The Linksys High Gain Antenna Kit saves wiring costs and helps to build corporate wireless infrastructure by driving stronger signals into distant corners and hard-to-reach areas. And it's perfect for covering large areas in warehouse environments, public spaces, wireless hotspots, and outdoor venues -- anywhere you need extra coverage for your wireless network.

Increases the effective range of Linksys wireless devices

Stronger signal increases wireless coverage into hard-to-reach areas and improves throughput by reducing retransmissions

Easy installation -- simply replace your current antennas

Works with both Wireless-G and Wireless-B devices




# High Gain Antenna Kit for R-TNC Connectors

Product Data

# High Gain Antenna Kit for R-TNC Connectors

## Features

- Increase wireless signal of your Linksys Wireless-G or Wireless-B devices
- Omni-directional design for 360 degrees of coverage
- Easy to install, no configuration necessary
- 1-year limited warranty

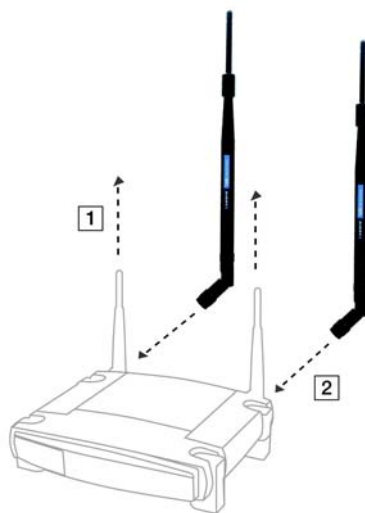

## Specifications

Model Number	HGA7T
Peak Gain	7 dBi
Frequency Range	2.4GHz ~ 2.5GHz
Voltage Standing Wave Ratio (VSWR)	1.92 Max.
Polarization	Linear Vertical
Direction	Omni-directional
Impedance	50 Ohms Nominal
Connector	Reverse TNC

## Environmental

Dimensions W x H x D	11.22" x 0.55" (285 mm x 14 mm)
Unit Weight	1.48 oz. (0.04 kg)
Operating Temp.	-4°F to 149°F (-20°C to 65°C)
Storage Temp.	-22°F to 167°F (-30°C to 75°C)
Operating Humidity	0% to 85% Non-Condensing

**Linksys**  
A Division of Cisco Systems, Inc.  
121 Theory  
Irvine, CA 92617 USA

E-mail: [sales@linksys.com](mailto:sales@linksys.com)  
[support@linksys.com](mailto:support@linksys.com)

Web: <http://www.linksys.com>

Linksys products are available in more than 50 countries, supported by 12 Linksys Regional Offices throughout the world. For a complete list of local Linksys Sales and Technical Support contacts, visit our Worldwide Web Site at [www.linksys.com](http://www.linksys.com).

## Works With:

- WRT54GS
- WRT54G (Up to version 6)
- WAP54G
- BEFW11S4
- WAP11
- AS2TNC (Antenna Stand)

## Package Contents

- Two High Gain Antennas for R-TNC Connectors
- One Antenna Stabilizer

Specifications are subject to change without notice. Linksys is a registered trademark or trademark of Cisco Systems, Inc. and/or its affiliates in the U.S. and certain other countries. Copyright © 2007 Cisco Systems, Inc. All rights reserved. Other brands and product names are trademarks or registered trademarks of their respective holders.